

# Bobcat® 773 G-Series Skid-Steer Loader

# SPECIFICATIONS

## Performance

	773	773 Turbo
Rated Operating Capacity <sup>1</sup>	1750 lb. (794 kg)	1850 lb. (839 kg)
ROC with Optional Counterweight	1850 lb. (839 kg)	1950 lb. (885 kg)
Tipping Load	3900 lb. (1769 kg)	3900 lb. (1769 kg)
Hydraulic Pump Capacity	16.7 GPM (63 L/min.)	16.7 GPM (63 L/min.)
High Flow Option	27.0 GPM (102 L/min.)	27.0 GPM (102 L/min.)
Travel Speed	7.0 MPH (11.3 km/hr.)	7.0 MPH (11.3 km/hr.)
Operating Weight	5808 lb. (2635 kg)	5808 lb. (2635 kg)

## Dimensions

	773	773 Turbo
Length (with bucket)	130.3 in. (3309 mm)	130.3 in. (3309 mm)
Width (with bucket)	68.0 in. (1727 mm)	68.0 in. (1727 mm)
Height	76.3 in. (1938 mm)	76.3 in. (1938 mm)
Height to Bucket Pin	118.2 in. (3002 mm)	118.2 in. (3002 mm)

## Engine

	Kubota/V2203-EB	Kubota/V2003T-EB
Make/Model	Kubota/V2203-EB	Kubota/V2003T-EB
Fuel/Cooling	Diesel/Liquid	Diesel/Liquid
Cylinders	4	4
SAE NET HP/Displacement	46/134 in. <sup>3</sup> (2.2 L)	56/122 in. <sup>3</sup> (2.0 L)
Fuel Tank Capacity	23 gal. (87.1 L)	23 gal. (87.1 L)

## Operation

Steering and Drive Hydraulics	Forward, reverse, travel speed and steering controlled by two hand levers. Raise/lower lift arms and dump/rollback bucket controlled by two foot pedals or optional hand controls.
Transmission	Hydrostatic, four-wheel drive.

## Standard Features

Adjustable Cushion Seat	Engine/Hydraulic Shutdown	Parking Brake
Automatically Activated	Front Auxiliary Hydraulics	Seat Bar (available for all Bobcat loaders)
Glow Plugs	Front & Rear Lights	Seat Belt
Bobcat Interlock Control System (BICS™)	Lift Arm Support	10-16.5 Bobcat Heavy Duty Tires
Bob-Tach	Gauges/Warning Lights	Turbo-Charger (Turbo Only)
Dual Path Cooling System	Operator Cab	(Approved Spark Arrester)


## Options/Accessories

Advanced Control System (ACS)	High Flow Auxiliary Hydraulics Package	Skid-Steer Loader Operator Training Kit
Air Conditioning (Turbo only)	Horn	Solid Tires
Attachment Control Kit	Hydraulic Bucket Positioning <sup>2</sup>	Sound Cab
Backup Alarm	Keyless Start System	Special Applications Kit <sup>3</sup>
Cab Enclosure	Power Bob-Tach	Suspension Seat (vinyl or cloth cover)
Cab Heater	Radio Kit	Top & Rear Windows
Catalytic Purifier	Rear Auxiliary Hydraulics	Ultra Grip Flotation Tires
Counterweight	Segmented Tires	Water Kit
Deluxe Cab	Service Safety Training Kit	
Deluxe Instrumentation	Side Windows	
Flasher/Strobe/Rotating Beacon Lights		

## Bobcat Attachments

Angle Broom*	Farm Grapple (for use with utility forks or bucket)	Soil Conditioner*
Auger	Front Scarifier	Spreader
Backhoe	Grader*	Stump Grinder*
Brushcat Rotary Cutter	Hydraulic Breaker <sup>4</sup>	Super Scraper
Buckets	Hydraulic Pallet Forks	Sweeper
Chipper*	Industrial Grapple	Three-Point Hitch
Combination Bucket	Landplane	Tiller
Concrete Mixer*	Landscape Rake	Tilt-Tatch
Concrete Pump*	Pallet Forks	Tracks
Cutter Crusher*	Planer*	Tree Spade*
Digger	Rear Stabilizer	Trench Compactor
Dozer Blade*	Snow Blade	Trencher
Dumping Hopper	Snowblower*	Utility Forks
Ejector Bucket	Sod Layer*	Vibratory Roller
		Water Kit
		Whiskers Push Broom

\*Attachment Control Kit Required.

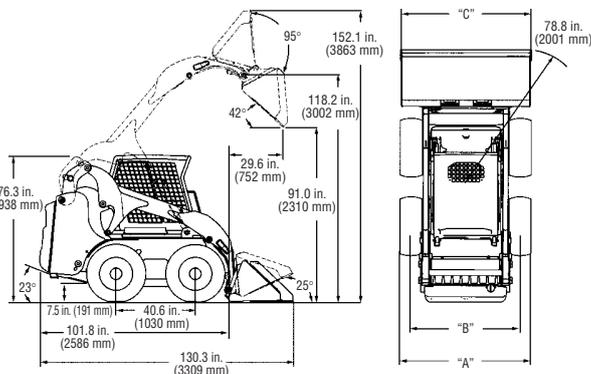

<sup>1</sup> Operating capacity rated with standard digging bucket according to SAE standard J818 - OPERATING CAPACITY TO EQUAL NO MORE THAN ONE HALF THE TIP LOAD.

<sup>2</sup> Bucket positioning helps operator keep the same tilt of the load during lifting.

<sup>3</sup> Includes Lexan front door, top and rear windows.

<sup>4</sup> Special application kit (see #3) must be used.

"A" 10 - 16.5 TIRES - 66.0" (1676 mm) or 60.0" (1524 mm)  
31.5 x 13 - 16.5 TIRES - 66.0" (1676 mm)

"B" 10 - 16.5 TIRES - 54.5" (1385 mm) or 48.5" (1232 mm)  
31.5 x 13 - 16.5 TIRES - 54.5" (1385 mm)

"C" 62 in. BUCKET WIDTH - 62.0" (1575 mm)  
68 in. BUCKET WIDTH - 68.0" (1727 mm)  
74 in. BUCKET WIDTH - 74.0" (1880 mm)

## THE BOBCAT 773 G-SERIES SKID-STEER LOADER... GREATER PERFORMANCE, VISIBILITY, COMFORT AND VALUE!

### Greater Performance

The vertical lift path 773 G-Series delivers added performance on every jobsite:

- More lift capacity (1750 lb. ROC; 1850 lb. with turbo)
- More lift height and reach for truck loading
- 11% more auxiliary hydraulic flow for better attachment operation
- 6% more weight for increased pushing force
- 64% more fuel capacity for all-day operation
- Factory- or field-installed deluxe instrument panel

### Greater Visibility

The 773's low-profile, vertical-path lift arm design and innovative G-Series cab enhance the operator's view to key areas during operation: the sides, front and rear corners of the loader.

Even with the optional front door, the 773 G-Series offers the operator increased visibility. As any operator will tell you, a better view of the work area means greater efficiency.

### Greater Comfort

The G-Series cab is designed with the operator in mind, for optimum comfort and functionality. And with its larger opening and dual-tilt cylinder lift arm design, it's easy to enter and exit.

The seat bar pivots from the rear, providing secondary restraint protection as well as a comfortable armrest for operators of all sizes. Plus, the new worklight design doubles the amount of illumination to the work area for better operation in low-light areas.

### Greater Options

- Factory- or field-installed, easy-to-read deluxe instrument panel
- High-flow auxiliary hydraulics to operate attachments requiring high hydraulic horsepower, such as planers and stump grinders
- Full suspension seat for all-day operator comfort

### Greater Value

Couple these features with proven power, smooth ride and vertical lift path capabilities and you've got a skid-steer loader that delivers optimum performance, no matter what the job. Get in the seat of a 773 G-Series today for a great view and an even greater value!

## 773

### 1750 LB.

Rated Operating Capacity

### 118.2 IN.

Lift Height

### 46 HP

Liquid-Cooled Diesel Engine

## 773 Turbo

### 1850 LB.

Rated Operating Capacity

### 118.2 IN.

Lift Height

### 56 HP

Turbo-Charged, Liquid-Cooled Diesel Engine

### Optional G-Series Deluxe Instrumentation Package includes:

- Multi-language capability
- System diagnostic capability
- All gauges read in metric or English units
- Feature lockouts
- Keyless start security
- Digital and job clocks
- Help screens
- Attachment information

NOTE — Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) standards. Specifications and design are subject to change without notice. Pictures of Bobcat loaders may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.



B-1718

Bobcat Company • P.O. Box 6000 • West Fargo, ND 58078 • [www.bobcat.com](http://www.bobcat.com)

Printed in U.S.A.



Kn-30M-801-#640302-F